




Decoslim LED Bulkhead

- Supplied with white trim. Chrome, satin, bronze and antique brass trims available
- The smart replacement for 2D and PL decorative fittings
- No lamp replacement
- 8M detection range on corridor dim option
- Cool White 4000K
- Emergency option
- Microwave and corridor dimming function option
- 3 year guarantee³
- IP54

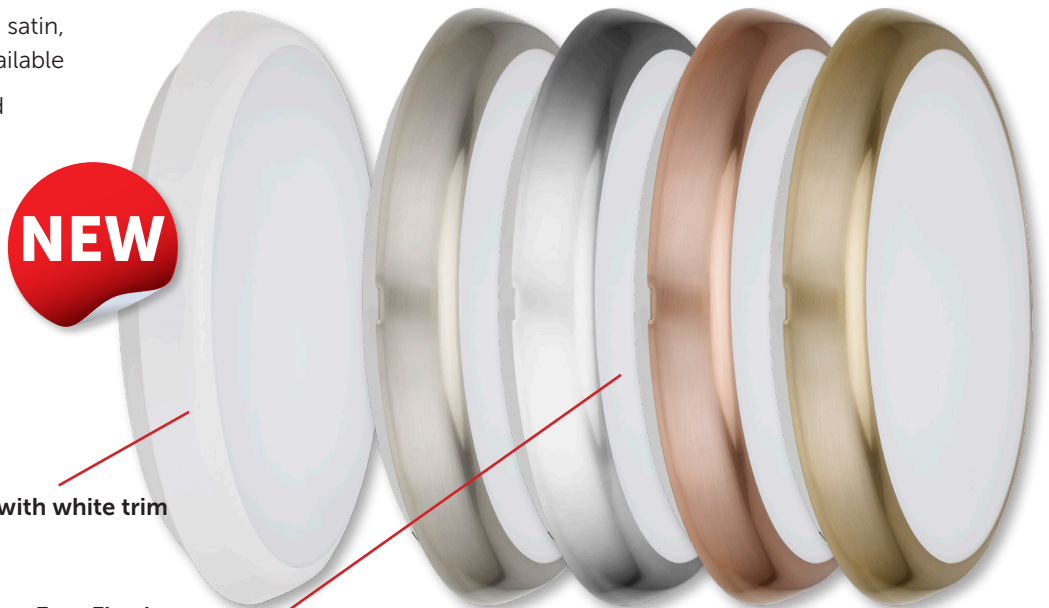

Supplied with white trim

Easy Fit trim options available

12W 28W Energy Saving 57%

18W 38W Energy Saving 52%

25W 55W Energy Saving 54%





Code	W	Description	lm	lm/w	Temp	Hours
06740	12	Deco Slim LED Bulkhead Standard On/Off	1056	88	4000K	40000
06741	18	Deco Slim LED Bulkhead Standard On/Off	1620	90	4000K	40000
06742	25	Deco Slim LED Bulkhead Standard On/Off	2150	86	4000K	40000
06743	12	Deco Slim LED Bulkhead Emergency	1056	88	4000K	40000
06744	18	Deco Slim LED Bulkhead Emergency	1620	90	4000K	40000
06745	25	Deco Slim LED Bulkhead Emergency	2150	86	4000K	40000
06746	12	Deco Slim LED Bulkhead Microwave Sensor	1056	88	4000K	40000
06747	18	Deco Slim LED Bulkhead Microwave Sensor	1620	90	4000K	40000
06748	25	Deco Slim LED Bulkhead Microwave Sensor	2150	86	4000K	40000
06749	12	Deco Slim LED Bulkhead Microwave Sensor Emergency	1056	88	4000K	40000
06750	18	Deco Slim LED Bulkhead Microwave Sensor Emergency	1620	90	4000K	40000
06751	25	Deco Slim LED Bulkhead Microwave Sensor Emergency	2150	86	4000K	40000
06790	12	Deco Slim LED Bulkhead Corridor Dim Function	1056	88	4000K	40000
06791	18	Deco Slim LED Bulkhead Corridor Dim Function	1620	90	4000K	40000
06792	25	Deco Slim LED Bulkhead Corridor Dim Function	2150	86	4000K	40000
06793	12	Deco Slim LED Bulkhead Corridor Dim Function Emergency	1056	88	4000K	40000
06794	18	Deco Slim LED Bulkhead Corridor Dim Function Emergency	1620	90	4000K	40000
06795	25	Deco Slim LED Bulkhead Corridor Dim Function Emergency	2150	86	4000K	40000
06752	-	Satin Trim for 12W Deco Slim LED Bulkhead	-	-	-	-
06753	-	Satin Trim for 18/25W Deco Slim LED Bulkhead	-	-	-	-
06754	-	Chrome Trim for 12W Deco Slim LED Bulkhead	-	-	-	-
06755	-	Chrome Trim for 18/25W Deco Slim LED Bulkhead	-	-	-	-
06756	-	Bronze Trim for 12W Deco Slim LED Bulkhead	-	-	-	-
06757	-	Bronze Trim for 18/25W Deco Slim LED Bulkhead	-	-	-	-
06758	-	Antique Brass Trim for 12W Deco Slim LED Bulkhead	-	-	-	-
06759	-	Antique Brass Trim for 18/25W Deco Slim LED Bulkhead	-	-	-	-



Technical Specification

Data	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
IP Rating	IP54
Operating Temp	-20°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	No

06740 12W

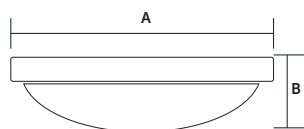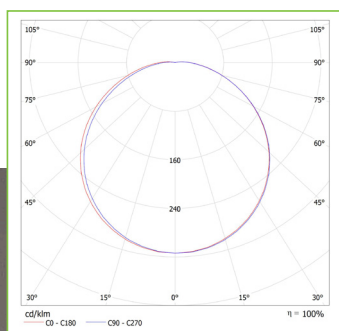

Model	A Ø	B Depth
12W	250	48
18W	300	48
25W	300	48



With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on automatically when someone enters the room.



When the room is empty, light dims to stand-by level (10% / 20% / 30%) after the hold-time.



Light switched off automatically after the stand-by period has elapsed.

Tri-Level Control (Corridor Function)

Offers 3 levels of light: 100%-dimmed light (10%, 20%, 30%)-off; and 2 periods of selectable waiting time: motion hold-time and stand-by period; selectable daylight threshold and choice of detection area.



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)