



# FirestayLED

CCT 3 way selectable colour switch

# Integrated LED Fixed / Tilt Downlight

- 30/60/90 minutes certified firestay
- Fixed Downlight / Centre Tilt IP65
- Fixed Downlight / Centre Tilt - Front CCT switch
- 6 in 1 Fixture, 3 colour temperatures, 2 bezel
- Includes satin & white magnetic bezels
- Part B / C / E compliant
- IC rated



**BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module:**


LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum

LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum



Code: 09598 (page 83)



Selectable Colour Temperature



Simply move the switch located under the magnetic bezel to your desired colour temperature

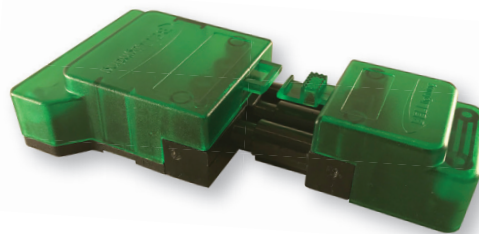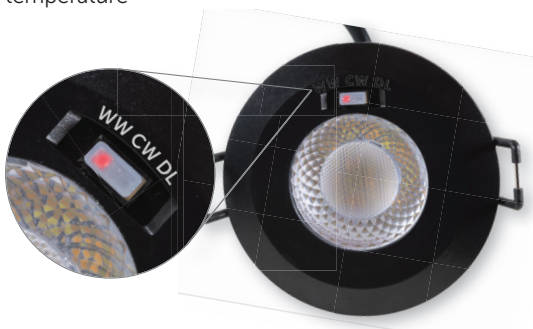

**Includes BELL Quick Fix Connector - Plug & Play Fitting**

Loop in / loop out terminals. Quick release connector for ease of insulation resistance testing.






# FirestayLED

CCT 3 way selectable colour switch


## Technical Specification

Data	
Construction	Die-Cast Aluminium
Driver	On Board
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio



### 08187 / 08190 8W

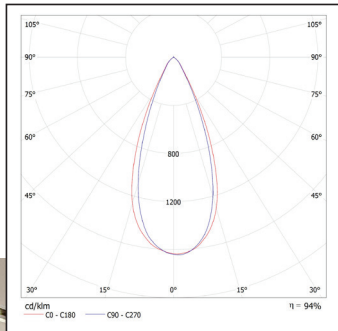

### 08187

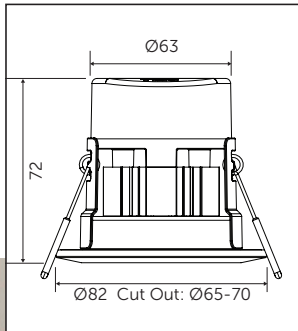

### 08190

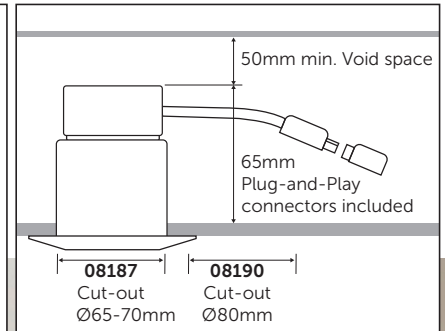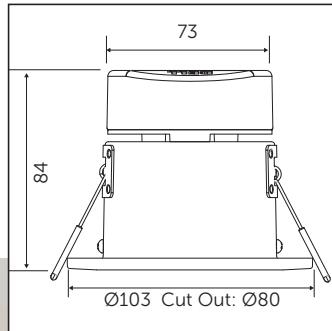

Code	Description	Colour Temperature	lm	cd	Beam <sup>o</sup>	Hrs
08187	7W Fire Rated Downlight, IP65, Selectable Colour Temp, Dimmable, incl White & Satin Bezels	3000K/4000K/6000K	530/550/600	530	40°	50000
08188	Brass Bezel for 7W Fire Rated Downlight	-	-	-	-	-
08189	Chrome Bezel for 7W Fire Rated Downlight	-	-	-	-	-
08193	White Spacer Plate for 08187 (100mm cut out)	--	-	-	-	-
08194	Satin Spacer Plate for 08187 (100mm cut out)	-	-	-	-	-
08190	7W Fire Rated Centre Tilt Downlight, IP20, Selectable Colour Temp, Dimmable, incl White & Satin Bezels	3000K/4000K/6000K	530/550/600	530	40°	50000
08191	Brass Bezel for 7W Centre Tilt Fire Rated Downlight	-	-	-	-	-
08192	Chrome Bezel for 7W Centre Tilt Fire Rated Downlight	-	-	-	-	-
09598	BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlight	-	-	-	-	-



<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio (LMR)  
<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index (CRI)  
<sup>3</sup> Subject to terms & conditions (Conditions apply to all products)

Technical Helpline +44 (0)1924 893380