



Valo 40W 2000K Datasheet

5,000lm LED Street Light

PXVALO40W

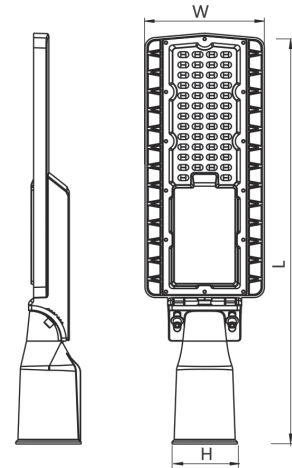

CE	UK CA	40W	IP66	LED	240V
----	-------	-----	------	-----	------

Dimensions	425*117*76mm
Wattage	40W
Weight	1.22kg
Material	Aluminum+PC
Colour/Finish	RAL9023
IK Rating	IK08
Voltage/Frequency	AC100-240V/50-60Hz
Luminous Flux	5,000lm
Luminous Efficacy	125lm/W
Color Rendering Index	70
Colour Temperature	2000K (Sodium Effect)
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	-
LEDs	50pc
Light Control	On/off
Beam Angle	Type II, Medium
Adjustable	-15 to +15 degrees
Chip	SMD 3030
IP Rating	IP66
Maintained Luminous Flux	(L80B10) 50,000h
Warranty	5 years

Features & Applications

- Tiltable 30°
- 2000K colour temperature (Sodium Effect)
- Highly Efficient 125 Lm/W
- Excellent photometric design
- Complete with NEMA socket
- IP66 protection rating
- 60mm pole diameter size
- 76mm spigot available (to be ordered separately)
- 50,000 hour lifetime
- Excellent heat dissipation to extend the life of the LEDs.
- 5 year warranty

Options Available	
Wall Bracket	PXVALOWBK
76mm Spigot	PXSP76
Photocell Kit Code	PXPCHEAD