
## **PRELUX**

## **Beam Adjustable Datasheet**

10W 750Lm LED Wall Light

**PXBEAM** 



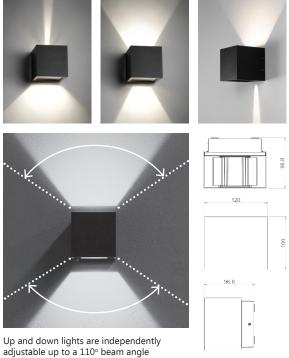

Dimensions	120*96.8*100mm
Input Voltage	AC220~240V/50-60Hz
Input Power	10W
Power Factor	≥0.9
Beam Angle	110° for single side
Housing Material	ADC12 Aluminium
Housing Colour	Black RAL 9005
Luminous Flux	750lm
<b>Color Rendering Index</b>	>80
Driver	Built-in
Life Time	50,000h
ССТ	3000K
LEDs	SMD
Protection Level	IP65
<b>Working Temperature</b>	-20°C~+45°C
Efficiency	≥90%
<b>Luminous Efficacy</b>	>75lm/W
Installation	Wall mounted
Warranty	3 Years

## **Features & Applications**

With up and down beam angles that are independently adjustable from narrow up to  $110^\circ$ , Beam is capable of producing dozens of different lighting effects in a single, minimalist fitting.

- Up & down wall lights are independently adjustable
- Dozens of different lighting effects in one fitting
- IP65 Protection Rating suitable for indoors/outdoors
- Up to 110° beam angle (for single side)
- Aluminium heat sink for excellent thermal dissipation
- 50,000 hour lifetime
- 3 year warranty

