

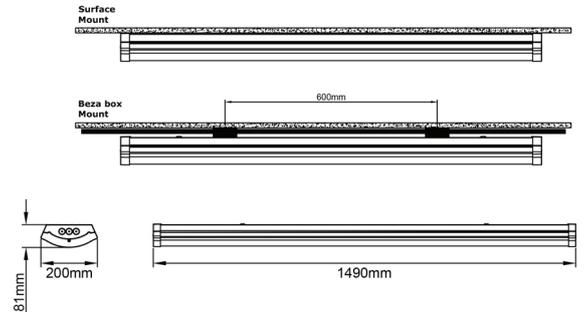


## Campus II 58W Dali Datasheet

4000K 7250Lm 125Lm/W LED Batten

PXCAMP58WD

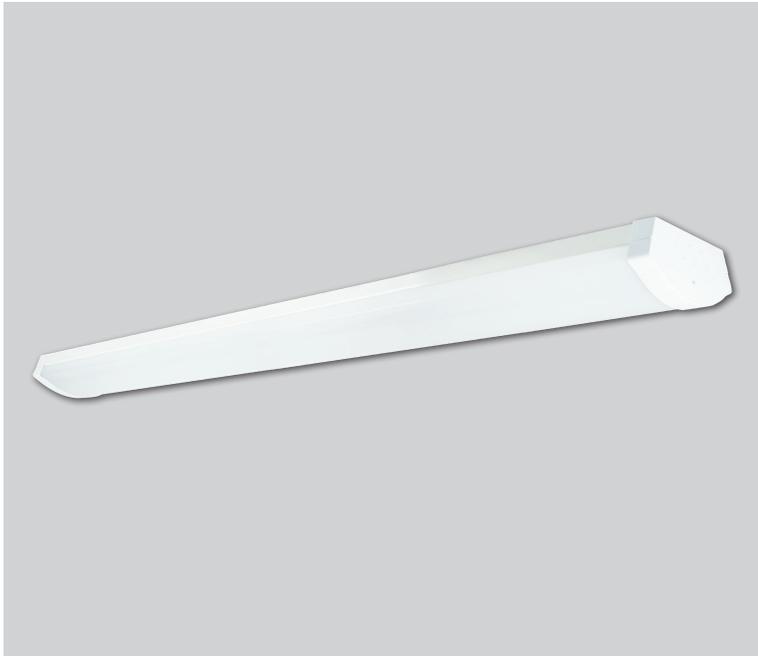

<b>Dimensions</b>	1490*200*81mm
<b>Weight</b>	2kg
<b>Material</b>	Steel body, PC diffuser
<b>Colour/Finish</b>	White
<b>IK Rating</b>	IK08
<b>Voltage/Frequency</b>	220-240V 50Hz
<b>Luminous Flux</b>	7250lm
<b>Luminous Efficacy</b>	125Lm/W
<b>Color Rendering Index</b>	80
<b>CCT Colour Temp</b>	4000K
<b>SDCM Colour Consistency</b>	<4
<b>UGR Unified Glare Rating</b>	<19
<b>LEDs</b>	Everlight
<b>Light Control</b>	Dali
<b>Beam Angle</b>	80°
<b>Adjustable</b>	No
<b>Chip</b>	Epistar
<b>Maintained Luminous Flux</b>	L80 (B10) 50,000h
<b>Warranty</b>	5 Years

### Features & Applications

The 58W 5ft UGR<19 Campus II surface luminaire is designed specifically for academic buildings. Also available in emergency mode, this slim, contemporary style twin surface fitting provides an highly efficient 125Lm/W and an excellent quality of luminance for learning environments.

#### Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.