
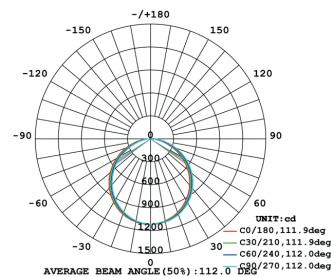


Othello CCT Dimmable EM Datasheet

25W 2400-2650Lm LED Bulkhead / Ceiling Light

PXOTH25CCTDE

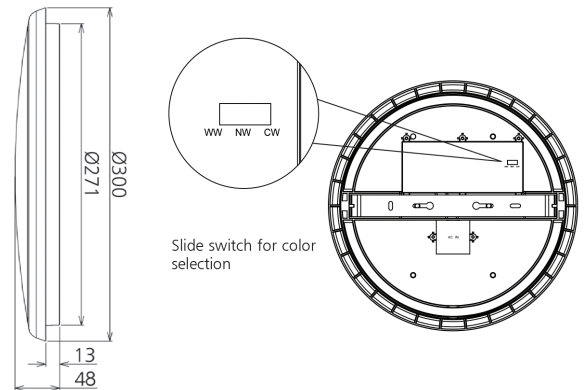

CE	UK CA	25W	IP54	LED	240V
----	----------	-----	------	-----	------

Dimensions	Ø300*48mm
Weight	0.93Kg
Material	PC Base
Colour/Finish	White
IK Rating	IK10
Voltage/Frequency	200-240V 50Hz
Luminous Flux	2400Lm (WW), 2650lm (CW), 2550Lm (DL)
Luminous Efficacy	100Lm/W
Color Rendering Index	>80
CCT Colour Temp	3000K / 4000K / 5700K
SDCM Colour Consistency	<6
UGR Unified Glare Rating	-
LEDs	2835 SMD
Light Control	Triac Dimming (8-100%)
Beam Angle	120°
Adjustable	No
Chip	SMD
Maintained Luminous Flux	L80 (B10) 40,000h
Emergency Mode	3-4h@4W, LiFePO4 Battery
Warranty	3 Years Fitting & Battery

Features & Applications

The Othello CCT comes with the ability to choose either warm, cool or daylight colour temperatures by sliding a switch on installation of the product.

The IP54 protection rating also makes it suitable for a wider range of applications, including stairwells, corridors and toilet facilities.

The slim design and superior quality finish also makes the Othello CCT range a superb choice when aesthetics are a consideration.

Options Available

Casambi Module	Available on Request
-----------------------	----------------------